




418.00 EUR  
 incl. 19% VAT, plus [shipping](#)

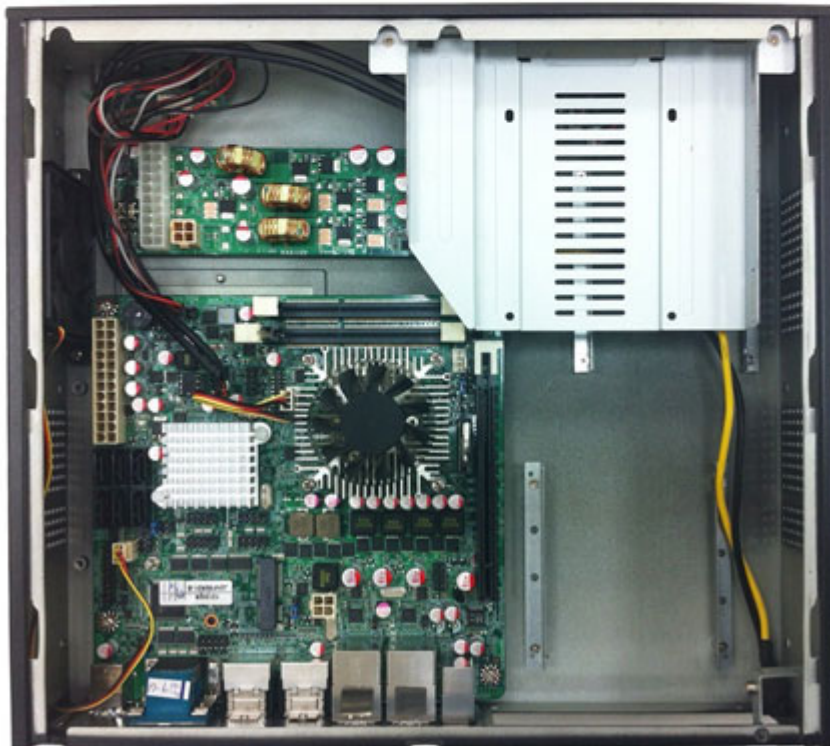

- AMD eTrinity R272F Processor (FS1r2 Socket) with A75 FCH (Hudson D3) Chipset
- Support DirectX 11 3D Graphics Acceleration
- Support 6 \* Serial ATA3 (6Gb/s) Devices with RAID 0, 1 & 10
- Support 2 \* SO-DIMM DDR3 1600 Dual Channel up to 16GB
- Integrated Realtek ALC662 HD Audio CODEC with 6-CH
- Support 4 \* HDMI Output Displays
- Supports 2 \* Realtek RT8111EVL Gigabit LAN
- Support CPU Smart FAN
- Mini-ITX Form Factor(170mm x 170mm)

<b>Model No</b>	<b>JBC128F83-272-B</b>
<b>Motherboard Specification</b>	
<b>CPU</b>	• Support AMD eTrinity R272F Processor (2.70GHz, Dual Core, FS1r2 Socket)
<b>Chipset</b>	• AMD A75 FCH Hudson D3 Chipset
<b>Memory</b>	• Dual Channel DDR3 memory technology • 2 x DDR3 1600 un-buffered memory SO-DIMM slots • Max. capacity of system memory up to: 16GB

<b>LAN</b>	<ul style="list-style-type: none"> <li>• 2 * Realtek RTL8111EVL LAN chip</li> <li>• PCI-Ex1 Gigabit LAN 10/100/1000 Mb/s</li> <li>• Support PXE</li> </ul>
<b>Audio</b>	<ul style="list-style-type: none"> <li>• Realtek ALC662 Audio CODEC</li> <li>• 5.1 CH HD Audio with Content Protection</li> </ul>
<b>Storage</b>	<ul style="list-style-type: none"> <li>• 6 * Serial ATA3 6Gb/s connectors support RAID 0, 1 &amp; 10functions</li> </ul>
<b>USB</b>	<ul style="list-style-type: none"> <li>• 8 * USB 2.0 ports (4 distribute in back panel, 4 distribute in mid-board)</li> <li>• 4 * USB 3.0 ports (2 distribute in back panel, 2 distribute in mid-board)</li> </ul>
<b>BIOS</b>	AMI EFI 64Mb SPI Flash ROM
<b>Form Factor</b>	Mini-ITX Form Factor, M/B 170 x 170mm
<b>Barebones Specification</b>	
<b>Specs Exposed</b>	1 x Slim ODD Drive Bay (Optional: 1 x 2.5" Drive Bay) Hidden: 2 x2.5" HDD Drive Bay
<b>Colors</b>	Black Color
<b>Cooling Fan</b>	Side: 6cm Fan x 2
<b>Front I/O Port</b>	2 x USB 2.0 1 x 4 in 1 card reader (shared with one front USB 2.0 port)
<b>Rear I/O Port</b>	4 x USB 2.0/1.1 ports 2 x USB 3.0 ports 4 x HDMI Ports 2 x RJ-45 Ports 3 x Audio jacks (Line In / Line Out / Microphone)
<b>Power supply</b>	19V 150W DC-DC Power Converter board
<b>Standard Accessory</b>	19V 120W AC-DC Adapter x1 and Power Cord x1 PCI-E x 16 Riser card x1 Wall Mount Bracket x2 CD x1 and Manual x1
<b>Functional</b>	Digital Signage, KIOSK, Advertising, Menu Boards, TV Walls, Traffic Intelligent Monitoring, Surveillance
<b>Packing</b>	Gross Weight■4.385KG, Net Weight■3.70KG
<b>Certificate</b>	CE,FCC For Barebone CE,FCC,TUV,UL,CCC,CB For Power Adapter