


298.00 EUR  
incl. 19% VAT, plus [shipping](#)

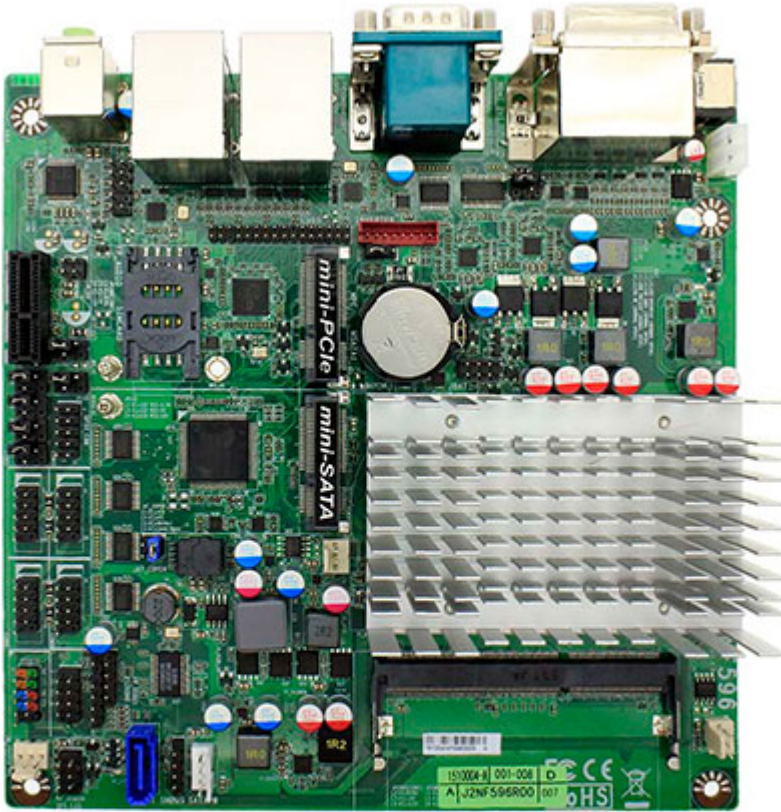

- Intel® Braswell –N3160 Processor
- 1 \* DDR3L 1600MHz SO-DIMM up to 8GB
- Support DVI-D, HDMI, LVDS 3 Independent Display
- Realtek RTL8111G PCIe GbE, 2 \* RJ45 ports
- Support 1 \* Serial ATAIII (6Gb/s), 1 \* Full size mSATA
- 1 \* RS232/422/485(COM1), 5 \* COM (RS232)
- 4 \* External USB3.0 & 3 \* Internal USB1.1/2.0
- 1 \* PCIe x1 slot, 1 \* Full size mPCIe
- 1 \* SIM Card Holder
- Integrated Realtek ALC662VD Audio CODEC with 4-CH
- Mini-ITX Form Factor (170mm \* 170mm)

<b>Form Factor</b>	
<b>Dimensions</b>	- Mini-ITX (6.7-in * 6.7-in, 170 * 170mm)
<b>Processor System</b>	
<b>CPU</b>	- Intel® Braswell – N3160 Processor
<b>Core Number</b>	- 4
<b>Max Speed</b>	- 2.24GHz
<b>L2 Cache</b>	- 2M
<b>Chipset</b>	- SoC
<b>BIOS</b>	- AMI 64Mb Flash ROM

<b>Expansion Slot</b>	
Mini-PCIe	- 1 (full size)
mSATA	- 1 (full size)
PCIe	- 1 (x1)
SIM card holder	- 1
<b>Memory</b>	
Technology	- 1 * DDR3L 1600 MHz SDRAM
Max.	- 8GB
Socket	- 1 * SO-DIMM
<b>Graphics</b>	
Controller	- Intel® HD Graphics
VRAM	- Shared Memory
VGA	- 0
DVI-D	- 1 ( DVI-D, Max. Resolution : 1920 * 1080@60Hz)
LVDS	- 1 ( 24-bits Dual Channel, Max. Resolution : 1920 * 1080@60Hz)
HDMI	- 1 (Max. Resolution : 1920 * 1080@60Hz)
MultiDisplay	- Yes ( Triple Independent Display )
<b>Ethernet</b>	
Ethernet	- 10/100/1000 Mbps
Controller	- PCIe GbE LAN : Realtek RTL8111G
Connector	- 2 * RJ 45
<b>Audio</b>	
CODEC	- HD Audio : Realtek ALC662VD
Channel	- 4 Channel
<b>SATA</b>	
Max Data Transfer Rate	- 1 * SATAIII (6.0Gb/s)
RAID	- No
<b>Rear I/O</b>	
VGA	- 0
DVI-D	- 1
HDMI	- 1
Ethernet	- 2
USB	- 4 * USB 3.0
Audio	- 1
Serial	- 2 (1 * RS232, 1 * RS232/422/485 with 5V/12V selectable header)
PS2	- 0
DC-input	- 1 * 12V DC-in
<b>Internal Connector</b>	
VGA	- 0
USB	- 3 * USB 2.0
LVDS / inverter	- 1
Serial	- 4 * RS232 with 5V/12V selectable header
SATA	- 0
mPCIe	- 1 (full size)
mSATA	- 1 (full size)

<b>M.2</b>	- 0
<b>SIM card holder</b>	- 1
<b>Chassis intrusion</b>	- 1
<b>PS/2</b>	- 1
<b>GPIO</b>	- 1 ( 4in/4 out)
<b>SMBUS/ I2C</b>	- 1 ( I2C)
<b>Audio Header</b>	- 1 ( Line-out & MIC)
<b>Audio Amplifier Header</b>	- 0
<b>AT mode</b>	- 1
<b>Watchdog Timer</b>	
<b>Output</b>	- From Super I/O to drag RESETCON#
<b>Interval</b>	- 256 segments, 0,1,2...255sec/min
<b>Power Requirements</b>	
<b>Input PWR</b>	- +12V DC-in PWR jack
<b>Power On</b>	AT/ATX Supported - AT : Directly PWR on as Power input ready - ATX: Press Button to PWR on after Power input ready
<b>Certifications</b>	
<b>Certifications</b>	- CE, FCC, RoHS, REACH
<b>Environment</b>	
<b>Temperature</b>	- Operating: 0°C – 60°C - Storage: -20°C – 85°C